









Cable Trunkings

halogen-free



Cable Trunkings halogen-free

Halogen-free cable trunkings and accessories

Material	Colour							
PC-ABS resp. ABS (accessories)	white RAL 9010	IEC 60754 EN 50085	halogen-free	y	IP40 (Trunkings)	L1	-5 °C to 60 °C	2 J

Cable trunking, 2 m Cable trunking, adhesive; 2 m external angle internal angle flat angle flat tee connector stop end




20x12,5 mm	Art.	2012,5BLH	2012,5BADLH	AE2012,5B	AI2012,5B	AP2012,5B	GT2012,5B	GU2012,5B	TT2012,5B
	PS	80 m	70 m	50 Pcs	50 Pcs	50 Pcs	50 Pcs	50 Pcs	50 Pcs
	PL	11200 m	9800 m	3750 Pcs	2700 Pcs	2700 Pcs	1500 Pcs	4800 Pcs	4800 Pcs
	PrGr	48	48	48	48	48	48	48	48
	Art.No.	105 612	105 613	105 618	105 619	105 620	105 621	105 622	105 623

Cable trunking, 2 m Cable trunking, adhesive; 2 m



Application 100x54 trunking 1-click-system

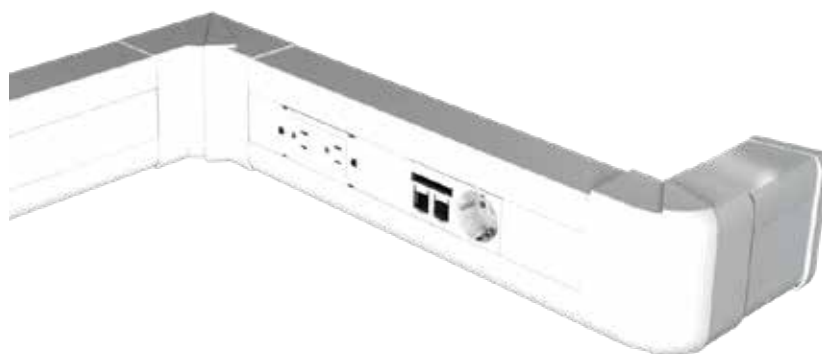

20x20 mm	Art.	2020BLH	2020BADLH
	PS	50 m	50 m
	PL	7000 m	7000 m
	PrGr	48	48
	Art.No.	105 614	105 615

Cable trunking, 2 m external angle internal angle flat angle flat tee connector stop end divider



60x40 mm	Art.	6040BLH	AE6040B	AI6040B	AP6040B	GT6040B	GU6040B	TT6040B	S8040LH
	PS	32 m	25 Pcs	25 Pcs	25 Pcs	10 Pcs	50 Pcs	25 Pcs	50 Pcs
	PL	1920 m	-	-	-	240 Pcs	-	750 Pcs	-
	PrGr	48	48	48	48	48	48	48	48
	Art.No.	105 616	105 624	105 625	105 626	105 627	105 628	105 629	105 636

Material
PC-ABS
resp. ABS
(accessories)

Colour
white
RAL 9010



IEC 60754
EN 50085



halogen-free



y



IP40 (Trunkings)



L1



-5 °C to 60 °C
-15 °C to 90 °C*



2 J
20 J*

Cable trunking*, 2 m external angle internal angle flat angle flat tee connector stop end divider



100x54 mm	Art.	10054BLH	AE10054B	AI10054B	AP10054B	GT10054B	GU10054B	TT10054B	S10040LH
	PS	12 m	6 Pcs	6 Pcs	8 Pcs	6 Pcs	20 Pcs	12 Pcs	35 Pcs
	PL	720 m	144 Pcs	-	-	180 Pcs	1500 Pcs	648 Pcs	-
	PrGr	48	48	48	48	48	48	48	48
	Art.No.	105 617	105 630	105 631	105 632	105 633	105 634	105 635	105 637

Your Advantage:

- reinforced wall structure
- innovative mounting and sealing system
- compatible with 45 mm 1-click-system
- pre-made mounting bores

Legend



Norm



HFT/LSF0H



flame retardant



class



UV level *



temperature




impact
resistance

Art.	article item code
PS	small packing
PL	large packing
PrGr	mat. pricing group
Art.No.	order reference number

* for an explanation of UV levels see www.dietzel-univolt.com/news/UVstabil


The new standard in halogen-free cabling:

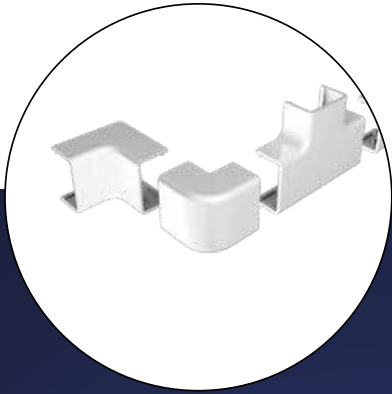

**versatile
accessories**



**compatible
with 45 mm
1-click-system**

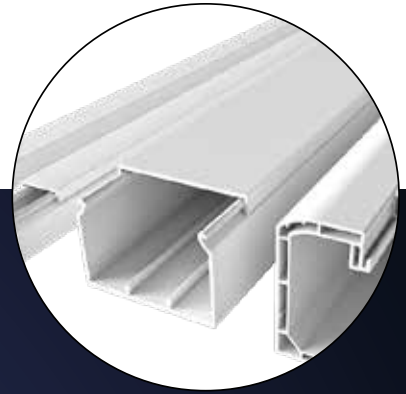

**halogen-free
and flame
retardant for
increased
safety**



Dietzel GmbH

1. Haidequerstr. 3-5
1110 Wien

+43 1 76076 0
export@dietzel-univolt.com
www.dietzel-univolt.com