


Data sheet

ID	HFSM BK
Description	slip type coupler, halogen free
Properties	for the connection of conduits, suitable for rigid and pliable conduits
Colour	black, similar to RAL 9005



Norms: EN 61386-1, EN 61386-21
 halogenfree according to EN 60754

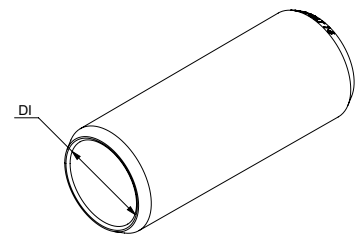

Working temperature	UV-Level*
-25 to +90 °C	L2

Art. no.	For tube diameter	ps	pl
020 556	16 mm	100 pc	1200 pc
020 557	20 mm	100 pc	800 pc
020 558	25 mm	50 pc	600 pc
020 559	32 mm	25 pc	300 pc
020 652	40 mm	25 pc	200 pc
020 653	50 mm	15 pc	120 pc
020 654	63 mm	8 pc	64 pc

Further technical details

Details	
Halogen free	True
Model	Plug-in
Material	PC-Blend

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).
 L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.
 L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.
 Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.