


Data sheet

ID	HWADW 120
Description	distribution box, draughtproof
Properties	drilled hole size required Ø 121 mm, box rim diameter Ø 126 mm, for partition board thickness from 7 to 35 mm, 5 conduit entries Ø 20 mm, 4 conduit entries Ø 25 mm and 16 cable entries
Colour	orange, similar to RAL 2004
Fire Behaviour	non flame propagating
Usage	for dry lining installations
Classification	400 V, IP 30, H

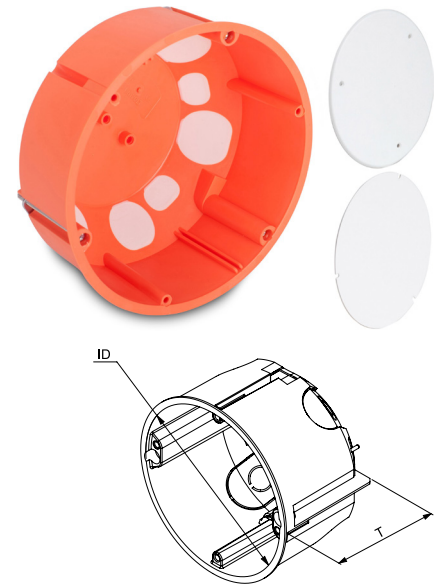

Halogen free
False

Degree of protection (IP)
IP30

Art. no.	Dimensions Ø/LxB x T	Cover model	Small Package	Large Package
101 395	Ø 120 x 64 mm	none	5 pc	50 pc
101 398	Ø 120 x 64 mm	with cover lid	5 pc	40 pc
101 399	Ø 120 x 64 mm	with wallpaper lid	5 pc	40 pc

Further technical details

Details	
break-out opening	
seal membrane	True
nozzle	False
step membrane	False
Mounting switching equipment	Screwing
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Details	
Model	Single
Shape	Round
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	False
Connectable	False
Equipped with	None
Cover attachment	Screwed
Material	PP/TPE