


Data sheet

ID	HWD 65 HFT
Description	outlet box, single gang, halogen-free
Properties	mounting screw spacing 60 mm, drilled hole size required \varnothing 68 mm, box rim diameter \varnothing 71 mm, for partition board thickness from 7 to 35 mm, maximum 4 conduit entries \varnothing 20 mm, 2 conduit entries \varnothing 25 mm and 4 cable entries
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating
Usage	for dry lining installations
Classification	400 V, IP 30, H

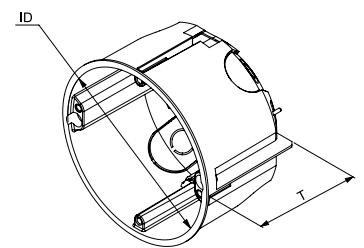

Norms: ÖVE/ÖNORM EN 60670-22:2007

halogenfrei according to DIN VDE 0604

halogenfree according to EN 50642

halogenfree according to EN 60754



Halogen free
True

Degree of protection (IP)
IP30

Art. no.	Dimensions \varnothing /LxB x T	Small Package	Large Package
103 039	\varnothing 65 x 45 mm	25 pc	250 pc

Further technical details

Details	
break-out opening	True
seal membrane	False
nozzle	False
step membrane	False
Mounting switching equipment	Screwing
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Details	
Model	Single
Shape	Round
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	False
Connectable	False
Equipped with	None
Cover attachment	Screwed
Material	PP-Blend