

GDDD

Multi Loose Tube Cables
Outdoor - Corrugated Steel Tape Armor (CST)
A-DF(ZN)2Y(SR)2Y
Full Rodent Protection

Ordering Information

Belden European Part Numbers

| Fibre type / count | 24 | 36 | 48 | 60 | 72 |
|---------------------------------------|--------------------------|---------|---------|---------|---------|
| 62.5/125-OM1 | GDDD124 | GDDD136 | GDDD148 | GDDD160 | GDDD172 |
| 50/125-OM2 BW 600/1200 | GDDD224 | GDDD236 | GDDD248 | GDDD260 | GDDD272 |
| 50/125-OM3 | GDDD324 | GDDD336 | GDDD348 | GDDD360 | GDDD372 |
| 50/125-OM2e | GDDD424 | GDDD436 | GDDD448 | GDDD460 | GDDD472 |
| 50/125-OM2 BW 500/500 | GDDD524 | GDDD536 | GDDD548 | GDDD560 | GDDD572 |
| 50/125-OM4 | GDDD624 | GDDD636 | GDDD648 | GDDD660 | GDDD672 |
| 9/125 ITU G.655 | GDDD724 | GDDD736 | GDDD748 | GDDD760 | GDDD772 |
| 9/125 ITU G.652D-OS2 | GDDD824 | GDDD836 | GDDD848 | GDDD860 | GDDD872 |
| Std. plywood reel (non-returnable) | Ø 1250 * 688 mm 93 kg | | | | |
| Std. delivery length | 2100 ± 100m | | | | |


Applications

- For **outdoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial.

Features & Benefits

- **High mechanical and full rodent protection** provided by corrugated steel tape (**CST**) armor.
- **Predicted lifetime > 30 years.**

Construction & Dimensions

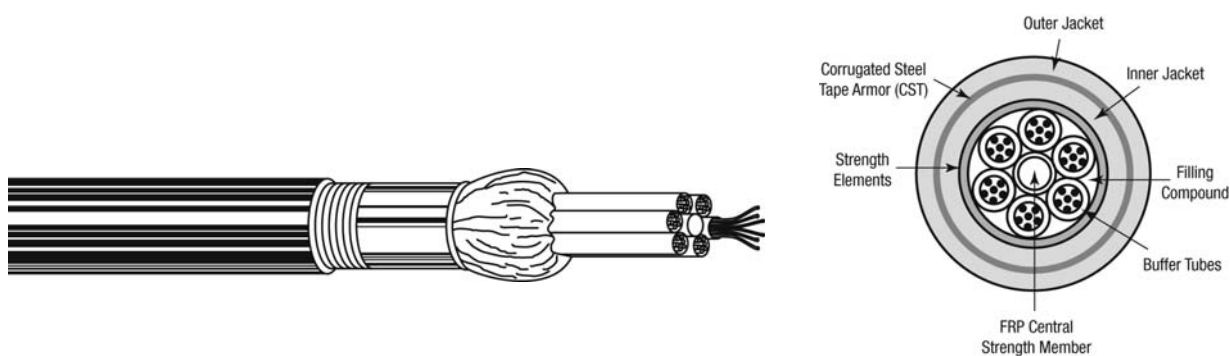

Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ($\varnothing 250 \pm 15 \mu\text{m}$). Individually colour coded optical fibres: red – green – blue – yellow – violet – pink – orange – black – grey – brown – white – turquoise.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural).
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Jelly filling compound between interstices, and PET foil over cable core.
5. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
6. PE inner jacket.
7. Corrugated Steel Tape Armoring (CST): longitudinally applied steel tape (0.155 mm).
8. Black UV resistant PE outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

| No. of fibres | Max. 72 |
|------------------------------------|-------------|
| Cable core | 6 tubes |
| \varnothing Central element (mm) | 2.7 |
| \varnothing Loose tube (mm) | 2.5 |
| \varnothing nom./max. (mm) | 15.0 / 15.3 |
| Energy of flame (kJ/m) | 6500 |
| Weight (kg/km) | 205 |

Optical Characteristics

Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

| European Partnumber Coding, Position 5 | Fibre-Type | Mode-Field /Cladding Diameter (um) | Wave-length (nm) | Attenuation average/ max. (dB/km) | Dispersion (ps/(nm·km)) | PMD (ps/km) | Cable Cut-off Wave-length (nm) |
|--|------------------------|------------------------------------|------------------|-----------------------------------|-------------------------|--------------------|--------------------------------|
| 8 | 9/125 G.652D OS2 | 9.2 ± 0.4 125 ± 0.7 | 1310 1550 | 0.32 / 0.40 0.21 / 0.30 | ≤ 3.5 ≤ 18 | ≤ 0.2 | ≤ 1260 |
| 7 | 9/125 G.655 | 8.4 ± 0.6 125 ± 1 | 1550 | 0.25 / 0.30 | 3.5 – 8.5 | ≤ 0.1 ^A | ≤ 1260 |

Note A- Link design value

Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

| European Partnumber Coding, Position 5 | Fibre-Type | Core/ Cladding Diameter (um) | Wave-length (nm) | Attenuation average/ max. (db/km) | Bandwidth (MHz·km) | Ethernet Performance (m) | | Num. Apert. (µm) | Refr. Index |
|--|-----------------|------------------------------|------------------|-----------------------------------|--------------------|--------------------------|-------------|------------------|----------------|
| | | | | | | 1GBE | 10 GBE | | |
| 1 | 62.5/125 OM1 | 62.5 ± 2.5 125 ± 1 | 850 1300 | 2.7 / 3.2 0.6 / 1.1 | ≥ 200 ≥ 600 | 275 550 | 33 n.a. | 0.275 ± 0.015 | 1.495 1.490 |
| 5 | 50/125 OM2 | 50 ± 2.5 125 ± 1 | 850 1300 | 2.4 / 3.0 0.7 / 1.0 | ≥ 500 ≥ 500 | 600 600 | 82 n.a. | 0.20 ± 0.015 | 1.481 1.476 |
| 2 | 50/125 OM2 | 50 ± 2.5 125 ± 1 | 850 1300 | 2.3 / 2.8 0.6 / 0.9 | ≥ 600 ≥ 1200 | 600 600 | 82 n.a. | 0.20 ± 0.015 | 1.481 1.476 |
| 4 | 50/125 OM2e | 50 ± 2.5 125 ± 1 | 850 1300 | 2,3 / 2,8 0,6 / 0,9 | ≥ 600 ≥ 1200 | 750 2000 | 110 na | 0.20 ± 0.015 | 1,481 1,476 |
| 3 | 50/125 OM3 | 50 ± 2.5 125 ± 1 | 850 1300 | 2.5 / 3.0 0.5 / 1.0 | ≥ 1500 ≥ 500 | 900 550 | 300 n.a. | 0.20 ± 0.015 | 1.482 1.477 |
| 6 | 50/125 OM4 | 50 ± 2.5 125 ± 1 | 850 1300 | 2.5 / 3.0 0.5 / 1.0 | ≥ 6000 ≥ 500 | 900 550 | 550 n.a. | 0.20 ± 0.015 | 1.482 1.477 |

A test report (attenuation) is supplied with each delivery.

Mechanical, Physical and/or Environmental Characteristics

| Requirements | |
|--|---|
| Temperature range according to IEC 60794-1-2-F1 Transport/storage Installation Operation | -30 to + 70 °C -5 to + 50 °C -30 to + 70 °C |
| Pulling tension according to IEC 60794-1-2-E1 Long term Short term | ≤ 3500 N ≤ 7000 N |
| Bending radii for fibres and tubes Installation/operation | >25 mm |
| Watertightness (core + inner jacket) according to IEC 60794-1-2-F5 | Yes |
| Crush resistance according to IEC 60794-1-2-E3 Armoured Central Loose Tube Cable | ≤ 50 KN/m |
| Bending radii cable Static according to IEC 60794-1-2-E11 Dynamic according to IEC 60794-1-2-E6 | 15 x Ø 20 x Ø |

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for indoor/outdoor use.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.

Revision

| Rev. | Description | Date | Init. |
|----------------|-------------------------------------|-------------|-----------------------------|
| 02 | Extended description watertightness | 22/03/10 | SN |
| 03 | Changed energy and weight | 22/11/10 | TvR |
| | | | |
| Date: 15/02/10 | | Page 1 of 1 | |
| Orig.: SN | | Review: | |
| | | | Part Number: GDDD |