

GEAD

Multi Loose Tube Cables
Universal – Indoor / Outdoor
A/I-DF(ZN)H

Ordering Information

Belden European Part Numbers

Fibre type / count	12	24	36	48	60	72
62.5/125-OM1	GEAD112	GEAD124	GEAD136	GEAD148	GEAD160	GEAD172
50/125-OM2 BW 600/1200	GEAD212	GEAD224	GEAD236	GEAD248	GEAD260	GEAD272
50/125-OM3	GEAD312	GEAD324	GEAD336	GEAD348	GEAD360	GEAD372
50/125-OM2e	GEAD412	GEAD424	GEAD436	GEAD448	GEAD460	GEAD472
50/125-OM2 BW 500/500	GEAD512	GEAD524	GEAD536	GEAD548	GEAD560	GEAD572
50/125-OM4	GEAD612	GEAD624	GEAD636	GEAD648	GEAD660	GEAD672
9/125 ITU G.655	GEAD712	GEAD724	GEAD736	GEAD748	GEAD760	GEAD772
9/125 ITU G.652D-OS2	GEAD812	GEAD824	GEAD836	GEAD848	GEAD860	GEAD872
Std. plywood reel (non-returnable)	Ø 1250 * 688 mm 93 kg					
Std. delivery length	2100 ± 100m					


Applications

- For **outdoor and indoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor and indoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial .

Features & Benefits

- **Predicted lifetime > 30 years.**

Construction & Dimensions

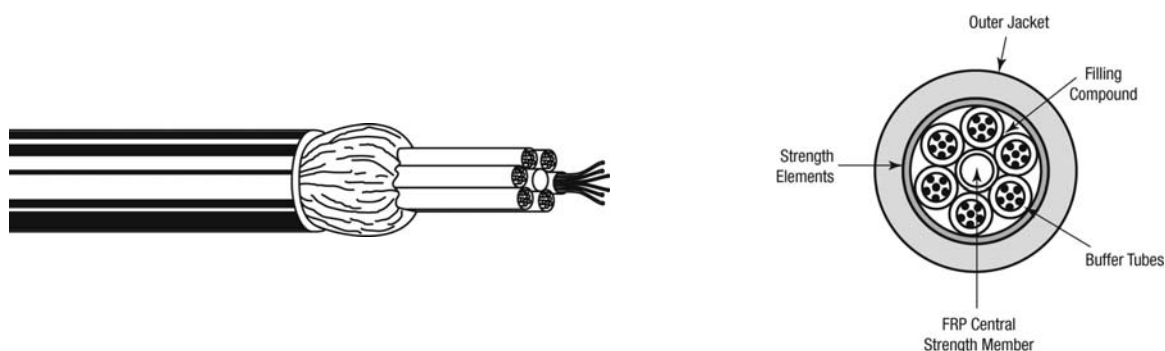

Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks, surrounded by swelling yarns.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ($\text{Ø } 250 \pm 15 \mu\text{m}$).
Individually colour coded optical fibres: red – green – blue – yellow – violet – pink – orange – black – grey – brown – white – turquoise.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural).
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Jelly filling compound between interstices, and PET foil over cable core.
5. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
6. Black UV resistant FRNC/LSNH outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 72
Cable core	6 tubes
Ø Central element (mm)	2.7
Ø Loose tube (mm)	2.5
Ø nom./max. (mm)	12.0 / 12.3
Energy of flame (kJ/m)	3400
Weight (kg/km)	134

Optical Characteristics

Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation average/ max. (dB/km)	Dispersion (ps/(nm-km))	PMD (ps/km)	Cable Cut-off Wave-length (nm)
8	9/125 G.652D OS2	9.2 ± 0.4 125 ± 0.7	1310 1550	0.32 / 0.40 0.21 / 0.30	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
7	9/125 G.655	8.4 ± 0.6 125 ± 1	1550	0.25 / 0.30	3.5 – 8.5	≤ 0.1 ^A	≤ 1260

Note A- Link design value

Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field Diameter (um)	Wave-length (nm)	Attenuation average/ max. (db/km)	Bandwidth (MHz•km)	Ethernet Performance (m)		Num. Apert. (µm)	Refr. Index
						1GBE	10 GBE		
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.2 0.6 / 1.1	≥ 200 ≥ 600	275 550	33 n.a.	0.275 ± 0.015	1.495 1.490
5	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.4 / 3.0 0.7 / 1.0	≥ 500 ≥ 500	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
2	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.8 0.6 / 0.9	≥ 600 ≥ 1200	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
4	50/125 OM2e	50 ± 2.5 125 ± 1	850 1300	2,3 / 2,8 0,6 / 0,9	≥ 600 ≥ 1200	750 2000	110 na	0.20 ± 0.015	1,481 1,476
3	50/125 OM3	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 1500 ≥ 500	900 550	300 n.a.	0.20 ± 0.015	1.482 1.477
6	50/125 OM4	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 6000 ≥ 500	900 550	550 n.a.	0.20 ± 0.015	1.482 1.477

A test report (attenuation) is supplied with each delivery.

Mechanical, Physical and/or Environmental Characteristics

Requirements		
Temperature range according to IEC 60794-1-2-F1	Transport/storage	-30 to + 70 °C
	Installation	-5 to + 50 °C
	Operation	-30 to + 70 °C
Pulling tension according to IEC 60794-1-2-E1	Long term	≤ 3500 N
	Short term	≤ 7000 N
Bending radii for fibres and tubes	Installation/operation	>25 mm
Watertightness according to IEC 60794-1-2-F5		Yes
Crush resistance according to IEC 60794-1-2-E3	Cable	≤ 20 KN/m
Bending radii cable	Static according to IEC 60794-1-2-E11	15 x Ø
	Dynamic according to IEC 60794-1-2-E6	20 x Ø
Flame retardancy according to	IEC 60332-3-22 (EN 50266-2-2)	Pass
	IEC 61034 (EN 50268)	Pass
Halogen-free according to IEC 60754-2 (EN 50267-2-2)	Corrosivity	pH ≥ 3.5 - μS/cm ≤ 100

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for outdoor use only.
- **Non-standard cable constructions**, colors, details and/or additional information regarding specifications are available on request.

Revision

Rev.	Description	Date	Init.
02	OS2 added	30/11/09	JW
03	Changed energy	22/11/10	TvR
Date: 17/11/09		Page 1 of 1	
Orig.: SN		Review:	
			Part Number: GEAD