


# Data sheet

ID	<b>NB BK</b>
Description	normal bend
Properties	for the connection of rigid conduits in an angle of 90°, especially für enclosed installations
Colour	black, similar to RAL 9005



Norms: ÖVE/ÖNORM EN 61386-1:2009, ÖVE/ÖNORM EN 61386-21:2012

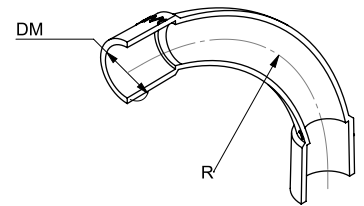

UV-Level

L1

Art. no.	For tube diameter	Radius	ps	pl
008 884	16 mm	50 mm	25 pc	300 pc
008 885	20 mm	70 mm	25 pc	200 pc
008 886	25 mm	95 mm	10 pc	80 pc
008 887	32 mm	125 mm	50 pc	-

## Further technical details

### Details

Halogen free	False
Model	Plug-in
Sleeve	True
Flexible	False
With inspection opening and cover	False
Angle of bow	90 °
Material	PVC-U

\*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.