

CU 7702 4P / 2x4P F8

Data cable, S/FTP, Category 7_A, AWG22, Euroclass Dca



- 1 Inner conductor: AWG22 Bare copper wire
- 2 PE insulated conductor: 1.5 mm Ø
- 3 Screen (pair): Alu PETP foil
- 4 Overall screen: Tinned braided copper
- 5 Outer sheath: FRNC/LSOH orange RAL 2003




DESCRIPTION

Electrically and mechanically superior quality Cat. 7_A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, IEC 61156-7, EN 50173-1 and prEN 50288-9-1. Excellent shielding effect due to individually screened pairs and overall copper braid. Easy identification of wires thanks to longitudinal colour markings. Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

APPLICATION

Data cable for structured premises cabling. For the transmission of digital and analogue voice, video and data signals. Suitable for all ICT network applications up to class F_A applications (1000 MHz) in accordance with EN 50173-1 and ISO/IEC 11801 and for the transmission of broadband signals (such as cable TV). Due to the increased wire section eminently suited for Power over Ethernet (PoE) / PoE+ and 4PPoE.

GRAPH

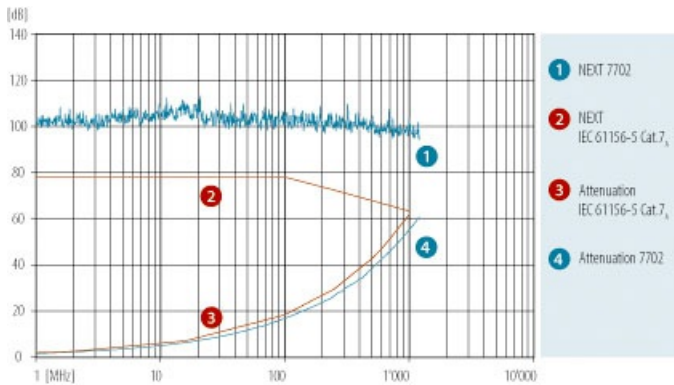

ELECTRICAL CHARACTERISTICS

Category	1	4	10	5e	6	6 _A	7	CATV	7 _A	1500
Frequency [MHz]				100	250	500	600	862	1000	
Attenuation [dB/100m]	1.7	3.4	5.3	16.9	27	40	42	53	56	69
NEXT [dB]	103	103	103	103	103	98	96	92	90	85
PS NEXT [dB]	100	100	100	100	100	95	93	89	87	82
ACR-N [dB]	101	100	98	86	76	58	54	39	34	21
PS-ACR-N [dB]	98	97	95	83	73	55	51	36	31	18
ACR-F [dB]	109	107	105	93	83	70	65	57	54	43
PS-ACR-F [dB]	106	104	102	90	80	67	62	54	51	40
Return loss [dB]	26	30	33	33	28	26	25	24	23	19

These performance data are typical measured values.

CU 7702 4P / 2x4P F8

Data cable, S/FTP, Category 7_A, AWG22, Euroclass Dca



ELECTRICAL PROPERTIES

Category:	Cat.7 _A
Coupling attenuation:	85 dB
Delay Skew:	15 ns/100 m
Impedance at 100 MHz, ±5Ω:	100 Ω
Loop resistance at 20°C:	< 116 Ω/km
Near end unbalance attenuation LCL at 1-600 MHz:	40 dB
NVP %:	76
operating capacity:	43 pF/m
Transfer impedance 1/10/30 MHz:	< 5/5/8 mΩ/m

SUPPORTED APPLICATIONS

10Base-T, 100Base-T, 1000Base-T, 2.5GBase-T, 5GBase-T, 10GBase-T, Fieldbus

MECHANICAL PROPERTIES

Minimum bending radius during installation:	64 mm
Minimum bending radius permanently installed:	32 mm
Tensile strength (4P):	120 N
Tensile strength (2x4P):	240 N
Minimal crush resistance / 10cm:	1,000 N
Minimum number of impacts:	10
Installation temperature:	0 °C - +50 °C
Operating temperature:	-20 °C - +60 °C

STANDARDS

Reaction to fire (Euroclass)	EN 13501-6: D _{ca}
Wire colour	white-blue/bluewhite-orange/orangewhite-green/greenwhite-brown/brown(with longitudinal stripes)in accordance with IEC 60189 and IEC 60708
Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Zero halogen, no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
PoE	IEEE 802.3bt
EMC	shielded
Segregation class	d
Cat./Class	Cat 7 _A / Class F _A - limit values as specified by IEC 61156-5 and EN 50288-9-1 guaranteed

VERSIONS

Article No.	DoP	Product	Reaction to fire (Euroclass)	Dimensions n x p x [mm (AWG)]	Sheath	Sheath colour	Sheath Ø [mm]	Weight [kg/km]	Cu rate [kg/km]	Fire load [MJ/m]	Fire load [kWh/m]	PU
1774000DK		CU 7702 4P	Dca-s2,d1,a1	4 x 2 x 0.62 (AWG22)	FRNC/LSZH	orange	7.6	62	34.9	0.64 MJ/m	0.18	1000 m drum
1774000DL		CU 7702 4P	Dca-s2,d1,a1	4 x 2 x 0.62 (AWG22)	FRNC/LSZH	orange	7.6	62	34.9	0.64 MJ/m	0.18	500 m drum
1773900DL		CU 7702 2x4P	Dca-s2,d1,a1	2 x (4 x 2 x 0.62 (AWG22))	FRNC/LSZH	orange	7.6 x 16.2	125	69.8	1.29 MJ/m	0.36	500 m drum