


# Class E / Cat. 6 - shielded

## Data cable Cat. 6

- Cu-Data cable up to 300 MHz 4x2xAWG23 for structured premises cabling
- applicable up to 1GBase-T
- Applicable standards: EN 50173-1:2002, ISO/IEC 11801:2002/A2:2010

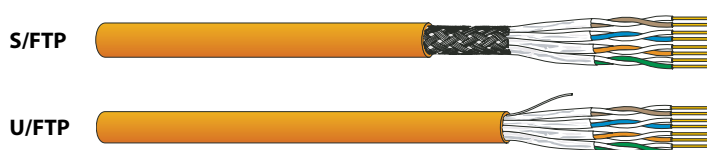

### uninet® 7060 4P S/FTP Cat.6<sub>A</sub> AWG23 (Cat.6<sub>A</sub> Data Cable for better performance)

Article No.	Dimension	Sheath	Sheath .	Weight	Cu weight	Fire load	Colour	PU
	n x n x mm (AWG)		mm	kg/km	kg/km	kWh/m	MJ/m	
182 924	4 x 2 x 0,55 (AWG23)	FRNC/LSOH <sup>1)</sup>	7,1	55,0	26,4	0,152	0,55	orange RAL 2003 1000m Drum

### uninet® 6002 4P U/FTP Cat.6 AWG23

Article No.	Dimension	Sheath	Sheath .	Weight	Cu weight	Fire load	Colour	PU
	n x n x mm (AWG)		mm	kg/km	kg/km	kWh/m	MJ/m	
182 936	4 x 2 x 0,55 (AWG23)	FRNC/LSOH <sup>1)</sup>	7,0	47,8	20,0	0,15	0,55	orange RAL 2003 1000m Drum

<sup>1)</sup> FRNC/LSOH = Flame Retardant Non Corrosive/Low Smoke Zero Halogen

## unilan® Modules

### RJ45 Modules shielded Cat. 6



KS-TS 1/8 Cat. 6, shielded tool-less



KS 1/8 Cat. 6, shielded



Insertion Tool 110



unilan® Keystone Hand Puck

Article No.	Description	Colour	PU
418 054	unilan® RJ45 Keystone KS-TS 1/8 Cat. 6 shielded Tool-less	metallic	10 pieces
418 050	unilan® Keystone Module KS 1/8 Cat.6 shielded	metallic	10 pieces
185 896	Insertion Tool 110 (recommended for RJ45 Keystone modules)		1 piece
185 898	unilan® Keystone Hand Puck, installation aid for RJ45 Keystone modules	red	1 piece