



PRODUCT SCHEMATIC DIAGRAM

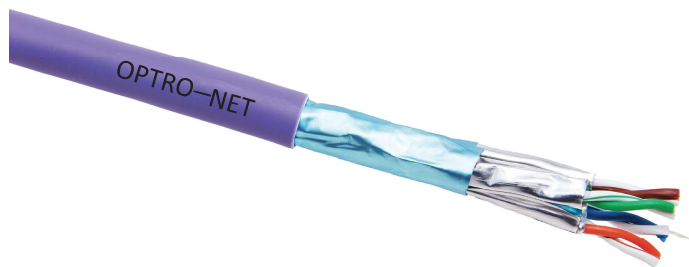

PRODUCT SCHEMATIC DIAGRAM

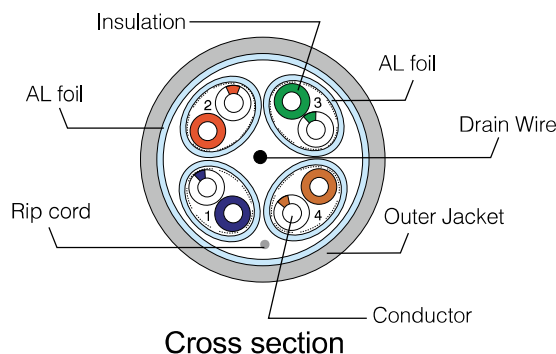

LSZH FR Sheath	IEC 60754-2, IEC 61034-2, IEC 60332-1-2, EN 50575, EN 50399
LSZH Sheath	IEC 60754-2, IEC 61034-2, IEC 60332-1-2, Reaction to fire Eca
Applicable Standards	ISO/IEC 11801, IEC 61156-5, EN 50173-1, EN 50173-2, EN 50288-10-1
Conductor Type and Size	Bare copper wire 23 AWG
Insulation	Foamed Polyethylene
Wire Diameter with Insulation	1.30±0.05 mm
Cable Diameter	7.5±0.3 mm (LSZH)
Weight	55 kg/km (LSZH)
Colour	RAL 4005 (LSZH)
NVP	74 %
Propagation delay	570 ns/100 m
Delay skew	≤45 ns/100 m
Storage/Operation Temperature	-30 to 90 °C (LSZH, LSZHFR), -20 to 75 °C (PVC) -30 to 60 °C (PE)
Installation Temperature	0 to +50 °C

10 Gbps

500 MHz

FORCE

COMPLIANCE WITH THE REQUIREMENTS

- ANSI/TIA 568-C.2
- EN 50173-1:2002
- ISO/IEC 11801:2002
- IEC 60332-1-2:2004+A1:2015
- IEC 61156-5
- IEC 60754-2:2011
- EN50399:2011+A1:2016
- IEC 61034-2:2005+A1:2013
- EN50575:2014+A1:2016

APPLICATION

- PBX, V.11, X.21, ISDN
- Fast Ethernet (100BASE-TX)
- Gigabit Ethernet (1000BASE-T)
- (10GBASE-T), ATMLAN 1,2 Gbit/s
- 10Gigabit Ethernet
- ATM-25/52/155 Mbit/s
- Token Ring 16/100 Mbit/s
- 100VG-AnyLAN
- Firewire 100 Mbit/s
- Ethernet (1Base-T)

Part No.	Description
■ 7935048	Installation Cable Category 6A 23AWG F/FTP SOL CABLE LSZH 500M Eca
■ 7935048/305	Installation Cable Category 6A 23AWG F/FTP SOL CABLE LSZH 305M Eca

OPTRO NET CAT 6A 23WAG F/FTP SOL CABLE – 10G / 500 MHZ

CATEGORY 6A INSTALLATION CABLES TRANSMISSION CHARACTERISTICS (AT 20°C)

f (MHz)	Attenuation (dB/100m)	NEXT (dB)	PSNEXT (dB)	Prop. Delay (ns/100m)	ACR-F (dB/100m)	PSACR-F (dB/100m)	Return Loss (dB)
1	2,1	74,3	72,3	570	67,8	64,8	20,0
4	3,8	65,3	63,3	552	55,8	52,8	23,0
8	5,3	60,8	58,8	547	49,7	46,7	24,5
10	5,9	59,3	57,3	545	47,8	44,8	25,0
16	7,5	56,2	54,2	543	43,7	40,7	25,0
20	8,4	54,8	52,8	542	41,8	38,8	25,0
25	9,4	53,3	51,3	541	39,8	36,8	24,2
31,25	10,5	51,9	49,9	540	37,9	34,9	23,3
62,5	15	47,4	45,4	539	31,9	28,9	20,7
100	19,1	44,3	42,3	538	27,8	24,8	19
200	27,6	39,8	37,8	537	21,8	18,8	16,4
250	31,1	38,3	36,3	536	19,8	16,8	15,6
300	34,3	37,1	35,1	536	18,3	15,3	14,9
400	40,1	35,3	33,3	536	15,8	12,8	13,8
500	45,3	33,8	31,8	536	13,8	10,8	13



7935048

7935048/305

