


OPTRO NET

Copper Structured Cabling

ON-EKTVNL-U1X C5e Keystone Jack, Vertical Narrow, Toolless Type, UTP, IDC : Toolless

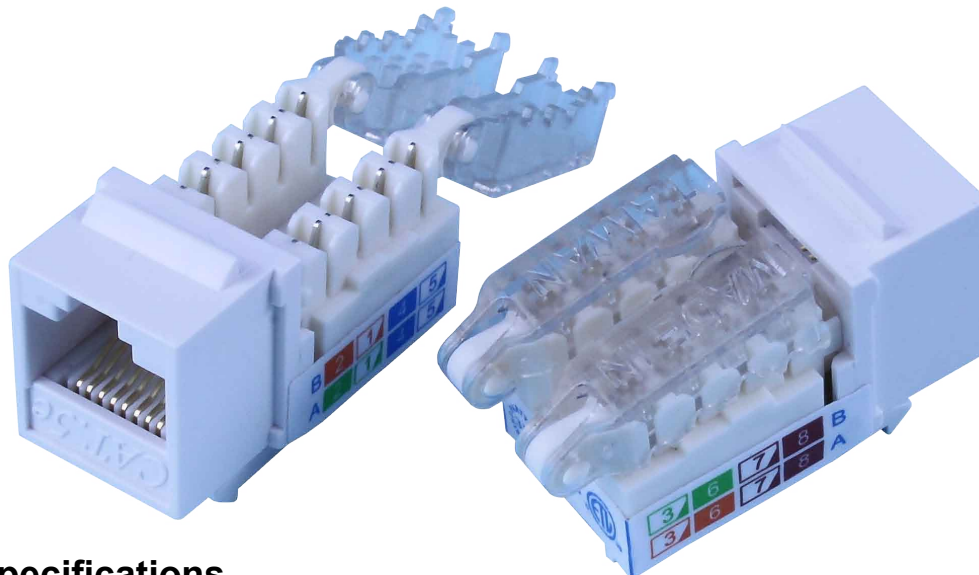

Electrical Specifications

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps.

DC Resistance : 0.1 ohms (max.)

Withstanding Voltage : 100 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications

IDC Punch Down Cycle : Over 250 Cycles (min.)

Jack Inserion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40°C ~ +70°C

Performance

Meets C5e EIA/TIA 568B Standard

Materials

Body	Fireproof ABS UL-94V0
Jack	8P8C 50 micro inches gold plated
PCB	FR-4 / UL-94V0
IDC Cap	Fireproof PC
IDC Body	Fireproof ABS UL-94V0
IDC Pin	Phosphor Bronze & Tinned
IDC Description	For 22-26AWG. For 110 or Krone punch-down Tool Toolless (when use IDC cap directly)