


ON-GPLD-F24BKZ-25 C6A Vertical 19"-1U Patch Panel, D Type, FTP, 24 Ports

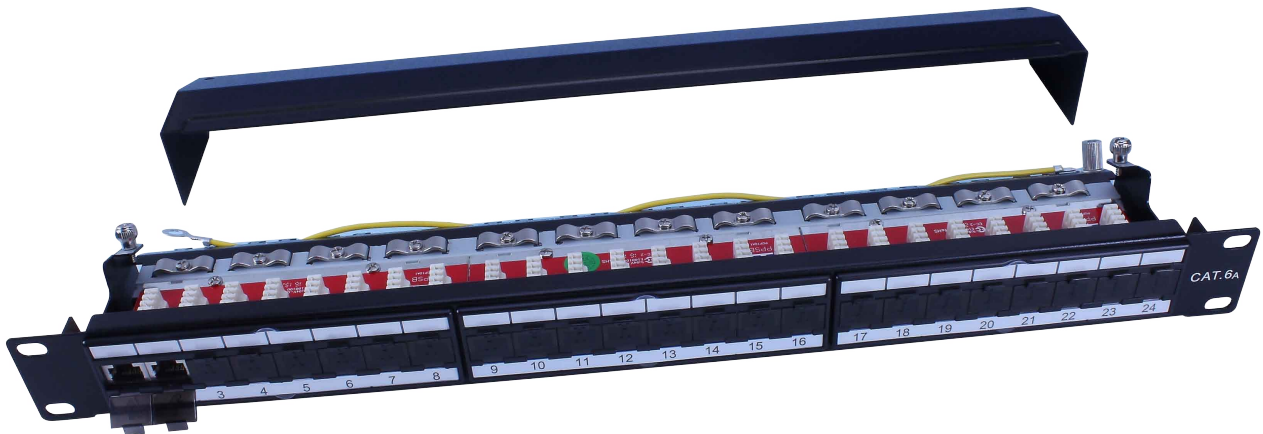

Performance

- a. T568A & T568B wiring sticker on PCB
- b. Insertion force : 30N max. (IEC 60603-7-5)
- c. Retention strength : 7.7kg between Jack and Plug
- d. Operating temperature : -10°C to 60°C (ISO/IEC 11801, ANSI/TIA/EIA568 B.2)
- e. Life(mating cycles) :
 - Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5)
 - IDC : Suitable for 22-26 AWG stranded and solid wire,
Compatible with Krone punch down tool
- f. The CAT.6A channel transmission performance is in compliance with
TIA/EIA 568C.2 10G & ISO/IEC 11801 standard

Material

Panel	SECC, 1.2mm thickness with optional color painted
Identification	1. I.D. Plate : PVC Transparent color 2. Paper 3. I.D. Bracket : ABS, UL 94V-0
RJ45 Jack	1. Housing : PBT+Glass Fiber, UL 94V-0 2. Contact Bracket : PBT+Glass Fiber, UL 94V-0
RJ45 Jack Contact	1. Material : Phosphor Bronze with Nickel plated 2. Finish : 50 micro-inch Gold plated on Plug contact area
RJ45 Jack Shield	Bronze with Nickel plated
Dust Cover	Polycarbonate, UL 94V-2
IDC	1. Housing : PC+Glass Fiber, UL 94V-2 2. Terminal : Phosphor Bronze with Tin plated
Ground wire	18 AWG Wire, with Green / Yellow striped color
PCB	FR4, UL 94V-0