

Drop Cable


ID: **Z237**



KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz
21.4.2015 ver.5

J/A-N(ZN)H 1000N max. 12F

This cable is suitable for indoor or outdoor aerial use.

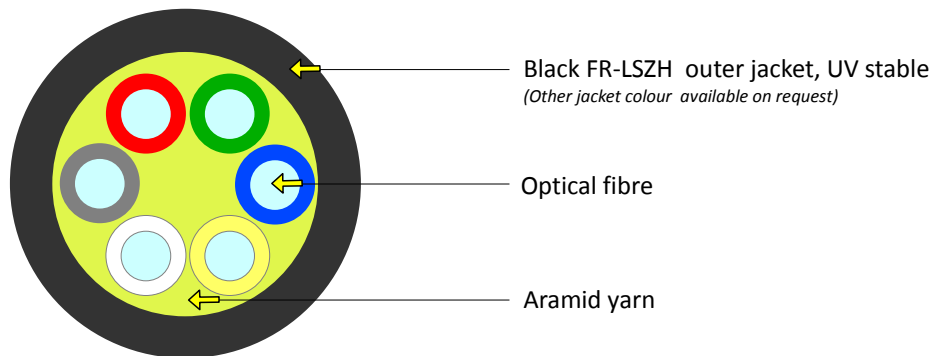

The picture represents a cable with 6 fibres



Recommended clamp
TELENCO Code 7593

Order example

2100 m J/A-N(ZN)H 1000N 12E9/125 G.657.A1 jacket colour BLK, cable specification Z237

Fibre colour coding

According to IEC 60304

1 Red	7 Brown
2 Green	8 Violet
3 Blue	9 Turquoise
4 Yellow	10 Black
5 White	11 Orange
6 Grey	12 Pink

Other fibre colour sequences available on request

Fibre Type

SM 9/125 G.657.A&B

See the Fibre Specification sheet

Sheet Marking

Print colour	White
Print method	INK-Jet
Print legend	manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Packaging Standard put-up length Drum size

Box	1000 m \pm 5% *	cardboard box with a spool
Spool	2100 m \pm 5% *	450x300x390

*other lengths on request

J/A-N(ZN)H 1000N max. 12F

Mechanical and Environmental properties

Test	Value	Unit	Method	Comment
Cable outer diameter	2F	3,2 ± 0,2	mm	EN 60811-1-1
	4F	3,6 ± 0,2		
	8F	3,6 ± 0,2		
	12F	3,8 ± 0,2		
Cable weight	2F	10,5	kg/km	- calculated
	4F	12		
	8F	12		
	12F	13		
Outer jacket thickness	0,7	mm		
Max. tensile strength	1000	N	EN 60974-1-2-E1	- max. fiber strain 0,8 % - 350 N fiber strain 0,3 % - max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Crush resistance test	1000	N	EN 60974-1-2-E3	- plate dimensions 100×100 mm - max. attenuation variation ≤ 0,05 dB at 1550 nm - duration of loading 1 min. - no increase attenuation after the test
Impact resistance test	3	Number of impact	EN 60974-1-2-E4	- impact energy 3 Nm, slightly damaged jacket - impact energy 5 Nm, no jacket cracking - max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Min. bend radius (no load)	10	mm	EN 60974-1-2-E11a	- max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Min. bend radius (load)	12	mm	EN 60974-1-2-E11b	- max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Temperature range	Installation Operation Storage	-5 to +50°C -20 to +60°C -20 to +60°C	EN 60794-1-22-F1	- max. attenuation variation ≤ 0,1 dB at 1550 nm - Dwell time in max. temperature 24 hours. - When installing or assembly under temperature bellow 5°C cable has to be stock in temp of 20°C at least 24h before installation. - no increase attenuation after the test
Fire properties – Flammability	pass		EN60332-3-22 (cat.A) ČSN EN 50266-2-2	- 40 min exposure to flame - length of the burned sample max. 2,5m
Fire properties – Acid gases	pass		EN 50267 EN 50267-2-2 EN 50267-2-3 EN 60754-1 EN 60754-2	- min. pH 4,3 - max. 10µS/mm
Fire properties – Smoke density	pass		EN 61034-1 EN 61034-2	- min. 60%

Cable life time - minimum 30 years

Drop Cable

ID: **Z237**



KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

21.4.2015 ver.5

J/A-N(ZN)H 1000N max. 12F

-1,4 ppm/K

Max. fibre strain 0,6%

SPAN (m)	INSTALATION		NESC LIGHT			NESC MEDIUM			NESC HEAVY		
			sag (m)		load (N)	Sag (m)		load (N)	sag (m)		load (N)
	Sag 1,5%(m)	N	horizontal	vertical		horizontal	vertical		horizontal	vertical	
20	0,3	28	0,48	0,22	196	0,46	0,57	405	0,48	0,79	668
30	0,5	38	0,83	0,38	257	0,78	0,97	534	0,82	1,34	884
40	0,6	56	1,16	0,54	325	1,12	1,39	664			
50	0,8	65	1,56	0,72	379	1,51	1,88	772			
60	0,9	84	1,94	0,90	438	1,91	2,37	883			
70	1,1	93	2,38	1,10	488						
80	1,2	112	2,79	1,29	542						
90	1,4	121	3,28	1,52	586						
100	1,5	140	3,72	1,72	638						
110	1,7	149	4,23	1,96	679						
120	1,8	167	4,70	2,18	728						
130	2,0	177	5,24	2,42	767						
140	2,1	195	5,73	2,65	814						
150	2,3	205	6,28	2,91	853						

SPAN (m)	INSTALATION		NESC LIGHT			NESC MEDIUM			NESC HEAVY		
			sag (m)		load (N)	Sag (m)		load (N)	sag (m)		load (N)
	Sag 3%(m)	N	horizontal	vertical		horizontal	vertical		horizontal	vertical	
20	0,6	14	0,65	0,30	145	0,54	0,67	345	0,53	0,87	604
30	0,9	21	1,03	0,48	206	0,88	1,1	475	0,89	1,45	820
40	1,2	28	1,44	0,67	263	1,27	1,57	591			
50	1,5	35	1,88	0,87	316	1,67	2,08	700			
60	1,8	42	2,34	1,08	365	2,1	2,61	805			
70	2,1	49	2,82	1,31	413						
80	2,4	56	3,31	1,53	460						
90	2,7	63	3,82	1,77	505						
100	3,0	70	4,35	2,01	548						
110	3,3	77	4,89	2,26	590						
120	3,6	84	5,44	2,52	631						
130	3,9	91	6,02	2,79	671						
140	4,2	98	6,59	3,05	711						
150	4,5	105	7,18	3,32	750						
160	4,8	112	7,79	3,61	787						
170	5,1	119	8,39	3,89	825						

