


FO patch panel OV-A

19"/1U, loaded

breakout box with adapters, without pigtails

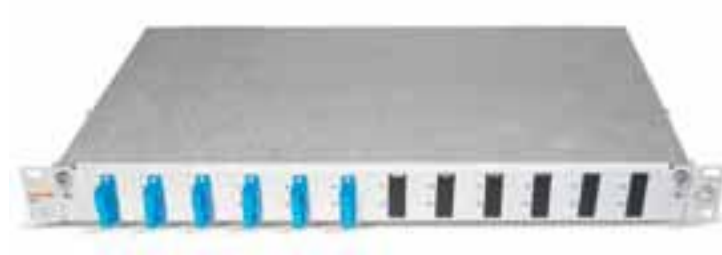

Fibre optic breakout box OV-A, 19"/1U, extractable, configuration example with 6 SCD adapters, without pigtails

PRODUCT INFORMATION

APPLICATION For the termination of pre-assembled fibre optic cables - maximum of 48 fibres. Loaded with a maximum of 12 / 24 FO adapters.

CONSTRUCTION

Housing: Colour (variants): Imprint: Capacity: Strain relief: Cable entry: Dimensions:	metallic, extractable drawer with locking mechanism, can be upgraded to OV-AT using telescopic slides: allows for depth-adjustable mounting of box (5 steps, maximum 50 mm) similar to RAL 7035, similar to RAL 9005 and stainless steel numbers (silk screen printing) on frontplate up to 48 fibres with cable tie and screwed cable gland rear left and right 19"/1U, depth 254 mm
--	---

CONNECTOR SYSTEM Adapter: ST, SCD, LCD, LSH

SCOPE OF DELIVERY Included are:
 - FO adapters, fastened by screws
 - fastening set

NOTE Variants on request

- Copper
- Fibre Optics
- Cabinets & Racks
- Data Centre
- Wireless
- Multimedia
- General Information

FO-Panel OV-A, THE BObox 0712/e

FO patch panel OV-A

19"/1U, loaded

breakout box with adapters, without pigtails

PRODUCT INFORMATION

Article No.	Description	Loaded with
191765	Breakout box OV-A, extractable, 1U	6x LCD SM adapter, blue polymer housing, with ceramic sleeve
190871	Breakout box OV-A, extractable, 1U	6x LCD MM adapter, beige polymer housing, with ceramic sleeve
191766	Breakout box OV-A, extractable, 1U	6x LCD MM adapter, turquoise polymer housing, with ceramic sleeve
191767	Breakout box OV-A, extractable, 1U	12x LCD SM adapter, blue polymer housing, with ceramic sleeve
190872	Breakout box OV-A, extractable, 1U	12x LCD MM adapter, beige polymer housing, with ceramic sleeve
191768	Breakout box OV-A, extractable, 1U	12x LCD MM adapter, turquoise polymer housing, with ceramic sleeve
191769	Breakout box OV-A, extractable, 1U	24x LCD SM adapter, blue polymer housing, with ceramic sleeve
190873	Breakout box OV-A, extractable, 1U	24x LCD MM adapter, beige polymer housing, with ceramic sleeve
191770	Breakout box OV-A, extractable, 1U	24x LCD MM adapter, turquoise polymer housing, with ceramic sleeve
191771	Breakout box OV-A, extractable, 1U	6x LSH/APC SM adapter, green polymer housing, with ceramic sleeve
191772	Breakout box OV-A, extractable, 1U	6x LSH MM adapter, black polymer housing, with ceramic sleeve
190878	Breakout box OV-A, extractable, 1U	12x LSH/APC SM adapter, green polymer housing, with ceramic sleeve
190874	Breakout box OV-A, extractable, 1U	12x LSH MM adapter, black polymer housing, with ceramic sleeve
190879	Breakout box OV-A, extractable, 1U	24x LSH/APC SM adapter, green polymer housing, with ceramic sleeve
190875	Breakout box OV-A, extractable, 1U	24x LSH MM adapter, black polymer housing, with ceramic sleeve
190876	Breakout box OV-A, extractable, 1U	6x SCD SM adapter, blue polymer housing, with ceramic sleeve
190869	Breakout box OV-A, extractable, 1U	6x SCD MM adapter, beige polymer housing, with PB sleeve
191773	Breakout box OV-A, extractable, 1U	6x SCD MM adapter, turquoise polymer housing, with PB sleeve
190877	Breakout box OV-A, extractable, 1U	12x SCD SM adapter, blue polymer housing, with ceramic sleeve
190870	Breakout box OV-A, extractable, 1U	12x SCD MM adapter, beige polymer housing, with PB sleeve
191774	Breakout box OV-A, extractable, 1U	12x SCD MM adapter, turquoise polymer housing, with PB sleeve
191775	Breakout box OV-A, extractable, 1U	24x SCD SM adapter, blue polymer housing, with ceramic sleeve
191776	Breakout box OV-A, extractable, 1U	24x SCD MM adapter, beige polymer housing, with PB sleeve
191777	Breakout box OV-A, extractable, 1U	24x SCD MM adapter, turquoise polymer housing, with PB sleeve
191778	Breakout box OV-A, extractable, 1U	6x ST SM adapter, metal housing, with ceramic sleeve
191779	Breakout box OV-A, extractable, 1U	6x ST MM adapter, metal housing, with PB sleeve
191780	Breakout box OV-A, extractable, 1U	12x ST SM adapter, metal housing, with ceramic sleeve
190867	Breakout box OV-A, extractable, 1U	12x ST MM adapter, metal housing, with PB sleeve
191781	Breakout box OV-A, extractable, 1U	24x ST SM adapter, metal housing, with ceramic sleeve
190868	Breakout box OV-A, extractable, 1U	24x ST MM adapter, metal housing, with PB sleeve

Copper

Fibre Optics

Cabinets & Racks

Data Centre

Wireless

Multimedia

General Information