

GDAD

Multi Loose Tube Cables
Outdoor
A-DF(ZN)2Y

Ordering Information

Belden European Part Numbers

Fibre type / count	12	24	36	48	60	72
62.5/125-OM1	GDAD112	GDAD124	GDAD136	GDAD148	GDAD160	GDAD172
50/125-OM2 BW 600/1200	GDAD212	GDAD224	GDAD236	GDAD248	GDAD260	GDAD272
50/125-OM3	GDAD312	GDAD324	GDAD336	GDAD348	GDAD360	GDAD372
50/125-OM2e	GDAD412	GDAD424	GDAD436	GDAD448	GDAD460	GDAD472
50/125-OM2 BW 500/500	GDAD512	GDAD524	GDAD536	GDAD548	GDAD560	GDAD572
50/125-OM4	GDAD612	GDAD624	GDAD636	GDAD648	GDAD660	GDAD672
9/125 ITU G.655	GDAD712	GDAD724	GDAD736	GDAD748	GDAD760	GDAD772
9/125 ITU G.652D-OS2	GDAD812	GDAD824	GDAD836	GDAD848	GDAD860	GDAD872
Std. plywood reel (non-returnable)	Ø 1250 * 688 mm 93 kg					
Std. delivery length	2100 ± 100m					


Applications

- For **outdoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial (crush ≤ 400 N/cm).

Features & Benefits

- **Predicted lifetime > 30 years.**

Construction & Dimensions

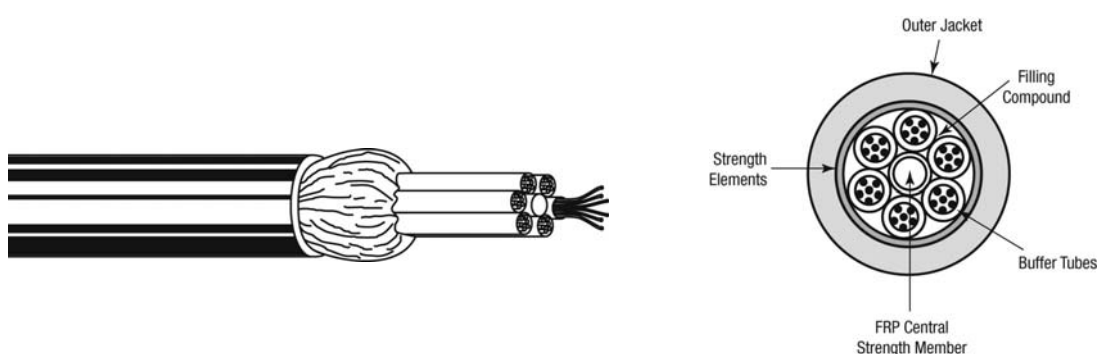

Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ($\text{Ø } 250 \pm 15 \mu\text{m}$).
Individually colour coded optical fibres: red – green – blue – yellow – violet – pink – orange – black – grey – brown – white – turquoise.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural).
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Jelly filling compound between interstices, and PET foil over cable core.
5. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
6. Black UV resistant PE outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 72
Cable core	6 tubes
Ø Central element (mm)	2.7
Ø Loose tube (mm)	2.5
Ø nom./max. (mm)	12.0 / 12.3
Energy of flame (kJ/m)	4400
Weight (kg/km)	106

Optical Characteristics

Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation average/ max. (dB/km)	Dispersion (ps/(nm-km))	PMD (ps/km)	Cable Cut-off Wave-length (nm)
8	9/125 G.652D OS2	9.2 ± 0.4 125 ± 0.7	1310 1550	0.32 / 0.40 0.21 / 0.30	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
7	9/125 G.655	8.4 ± 0.6 125 ± 1	1550	0.25 / 0.30	3.5 – 8.5	≤ 0.1 ^A	≤ 1260

Note A- Link design value

Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field Diameter (um)	Wave-length (nm)	Attenuation average/ max. (db/km)	Bandwidth (MHz•km)	Ethernet Performance (m)		Num. Apert. (µm)	Refr. Index
						1GBE	10 GBE		
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.2 0.6 / 1.1	≥ 200 ≥ 600	275 550	33 n.a.	0.275 ± 0.015	1.495 1.490
5	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.4 / 3.0 0.7 / 1.0	≥ 500 ≥ 500	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
2	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.8 0.6 / 0.9	≥ 600 ≥ 1200	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
4	50/125 OM2e	50 ± 2.5 125 ± 1	850 1300	2,3 / 2,8 0,6 / 0,9	≥ 600 ≥ 1200	750 2000	110 na	0.20 ± 0.015	1,481 1,476
3	50/125 OM3	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 1500 ≥ 500	900 550	300 n.a.	0.20 ± 0.015	1.482 1.477
6	50/125 OM4	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 6000 ≥ 500	900 550	550 n.a.	0.20 ± 0.015	1.482 1.477

A test report (attenuation) is supplied with each delivery.

Mechanical, Physical and/or Environmental Characteristics

Requirements	
Temperature range according to IEC 60794-1-2-F1 Transport/storage Installation Operation	-30 to + 70 °C -5 to + 50 °C -30 to + 70 °C
Pulling tension according to IEC 60794-1-2-E1 Long term Short term	≤ 3500 N ≤ 7000 N
Bending radii for fibres and tubes Installation/operation	>25 mm
Watertightness according to IEC 60794-1-2-F5	Yes
Crush resistance according to IEC 60794-1-2-E3 Cable	≤ 20 KN/m
Bending radii cable Static according to IEC 60794-1-2-E11 Dynamic according to IEC 60794-1-2-E6	15 x Ø 20 x Ø

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for indoor/outdoor use.
- **Non-standard cable constructions**, colors, details and/or additional information regarding specifications are available on request.

Revision

Rev.	Description	Date	Init.
02	OM3+ changed to OM4	12/10/09	JW
03	OS2 added	30/11/09	JW
04	Changed energy	22/11/10	TvR
Date: 30/09/09		Page 1 of 1	
Orig.: SN		Review:	
			Part Number: GDAD