

GEDD

Multi Loose Tube Cables
 Universal – Indoor / Outdoor - Corrugated Steel Tape Armor (CST)
 A/I-DF(ZN)H(SR)H
 Full Rodent Protection

Ordering Information

Belden European Part Numbers

Fibre type / count	24	36	48	60	72
62.5/125-OM1	GEDD124	GEDD136	GEDD148	GEDD160	GEDD172
50/125-OM2 BW 600/1200	GEDD224	GEDD236	GEDD248	GEDD260	GEDD272
50/125-OM3	GEDD324	GEDD336	GEDD348	GEDD360	GEDD372
50/125-OM2e	GEDD424	GEDD436	GEDD448	GEDD460	GEDD472
50/125-OM2 BW 500/500	GEDD524	GEDD536	GEDD548	GEDD560	GEDD572
50/125-OM4	GEDD624	GEDD636	GEDD648	GEDD660	GEDD672
9/125 ITU G.655	GEDD724	GEDD736	GEDD748	GEDD760	GEDD772
9/125 ITU G.652D-OS2	GEDD824	GEDD836	GEDD848	GEDD860	GEDD872
Std. plywood reel (non-returnable)	Ø 1250 * 688 mm 93 kg				
Std. delivery length	2100 ± 100m				


Applications

- For **outdoor and indoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor and indoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial.

Features & Benefits

- **High mechanical and full rodent protection** provided by corrugated steel tape (**CST**) armor.
- **Predicted lifetime > 30 years.**

Construction & Dimensions

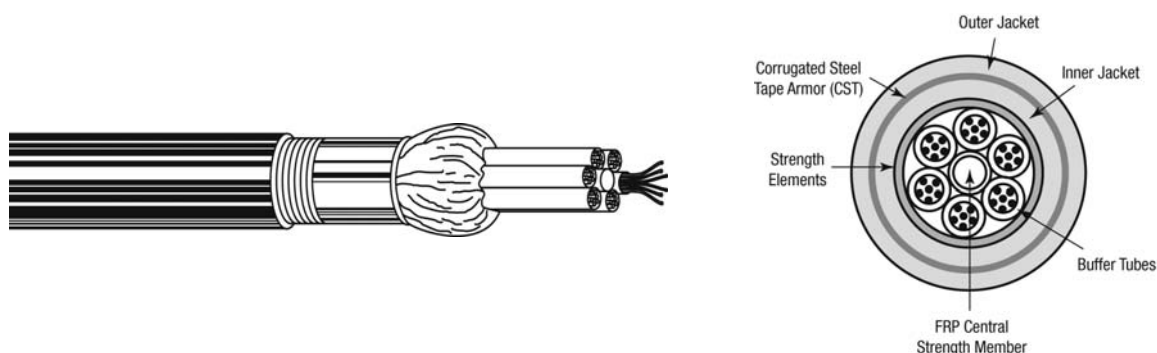

Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ($\text{Ø } 250 \pm 15 \mu\text{m}$). Individually colour coded optical fibres: red – green – blue – yellow – violet – pink – orange – black – grey – brown – white – turquoise.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural).
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Jelly filling compound between interstices, and PET foil over cable core.
5. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
6. FRNC/LSNH inner jacket.
7. Corrugated Steel Tape Armoring (CST): longitudinally applied steel tape (0.155 mm).
8. Black UV resistant FRNC/LSNH outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 72
Cable core	6 tubes
Ø Central element (mm)	2.7
Ø Loose tube (mm)	2.5
Ø nom./max. (mm)	15.0 / 15.3
Energy of flame (kJ/m)	4400
Weight (kg/km)	286

Optical Characteristics

Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation average/ max. (dB/km)	Dispersion (ps/(nm-km))	PMD (ps/km)	Cable Cut-off Wave-length (nm)
8	9/125 G.652D OS2	9.2 ± 0.4 125 ± 0.7	1310 1550	0.32 / 0.40 0.21 / 0.30	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
7	9/125 G.655	8.4 ± 0.6 125 ± 1	1550	0.25 / 0.30	3.5 – 8.5	≤ 0.1 ^A	≤ 1260

Note A- Link design value

Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field Diameter (um)	Wave-length (nm)	Attenuation average/ max. (db/km)	Bandwidth (MHz•km)	Ethernet Performance (m)		Num. Apert. (µm)	Refr. Index
						1GBE	10 GBE		
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.2 0.6 / 1.1	≥ 200 ≥ 600	275 550	33 n.a.	0.275 ± 0.015	1.495 1.490
5	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.4 / 3.0 0.7 / 1.0	≥ 500 ≥ 500	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
2	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.8 0.6 / 0.9	≥ 600 ≥ 1200	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
4	50/125 OM2e	50 ± 2.5 125 ± 1	850 1300	2,3 / 2,8 0,6 / 0,9	≥ 600 ≥ 1200	750 2000	110 na	0.20 ± 0.015	1,481 1,476
3	50/125 OM3	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 1500 ≥ 500	900 550	300 n.a.	0.20 ± 0.015	1.482 1.477
6	50/125 OM4	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 6000 ≥ 500	900 550	550 n.a.	0.20 ± 0.015	1.482 1.477

A test report (attenuation) is supplied with each delivery.

Mechanical, Physical and/or Environmental Characteristics

Requirements		
Temperature range according to IEC 60794-1-2-F1		
Transport/storage		-30 to + 70 °C
Installation		-5 to + 50 °C
Operation		-30 to + 70 °C
Pulling tension according to IEC 60794-1-2-E1		
Long term		≤ 3500 N
Short term		≤ 7000 N
Bending radii for fibres and tubes		
Installation/operation		>25 mm
Watertightness (core + inner jacket) according to IEC 60794-1-2-F5		Yes
Crush resistance according to IEC 60794-1-2-E3		
Armoured Central Loose Tube Cable		≤ 50 KN/m
Bending radii cable		
Static according to IEC 60794-1-2-E11		15 x Ø
Dynamic according to IEC 60794-1-2-E6		20 x Ø
Flame retardancy according to		
IEC 60332-3-22 (EN 50266-2-2)		Pass
IEC 61034 (EN 50268)		Pass
IEC 60331-25		Pass
Halogen-free according to IEC 60754-2 (EN 50267-2-2)		
Corrosivity		pH ≥ 3.5 - µS/cm ≤ 100

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for outdoor use only.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.

Revision

Rev.	Description	Date	Init.
02	Extended description watertightness	22/03/2010	SN
03	Changed Energy and updated P/N table	22/11/2010	TvR
Date: 15/02/10		Page 1 of 1	
Orig.: SN		Review:	
			Part Number: GEDD