


# A-DQ(BN)B2Y max. 12F

This cable is suitable for outdoor installation.

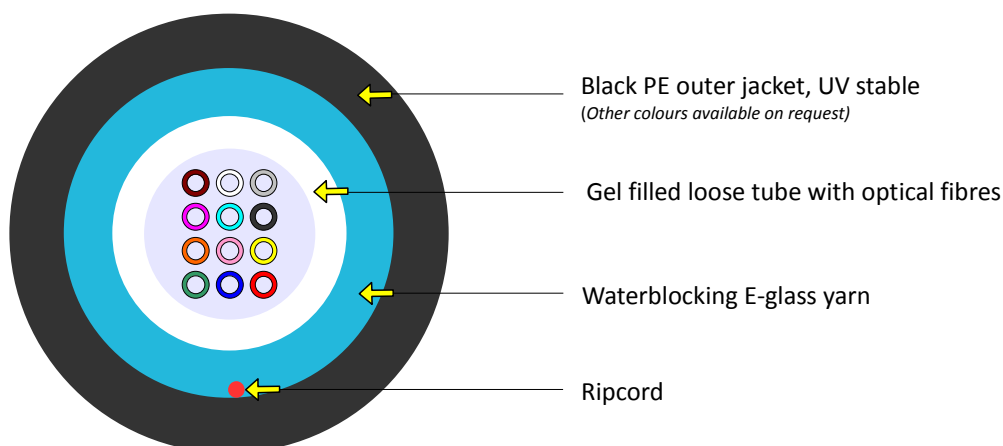

### Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	6,5±0,4	mm	EN 60811-203
Cable weight	39	kg/km	
Outer jacket thickness	1,2	mm	
Loose tube diameter	2,5	mm	
Coefficient of friction	0,13		
Max. tensile strength	2000	N	EN 60794-1-21-E1
Crush resistance test	2000	N	EN 60794-1-21-E3
Impact resistance test	20	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-20 to + 70	°C
	Storage	-20 to + 70	°C

Cable life time - minimum 30 years

### Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

### Packing

Depending on ordered put-up lengths

